

Positioning requirements


1. The distance from obstacles around the entire machine should be at least 1 meter.

4. The voltage fluctuation of the whole machine's connection is within \pm 5%.

5. Please place the fan and air source in a location that does not affect their use.

2. The whole machine should be kept away from the earthquake source.

3. The flatness of the whole machine in place should not exceed 5mm.

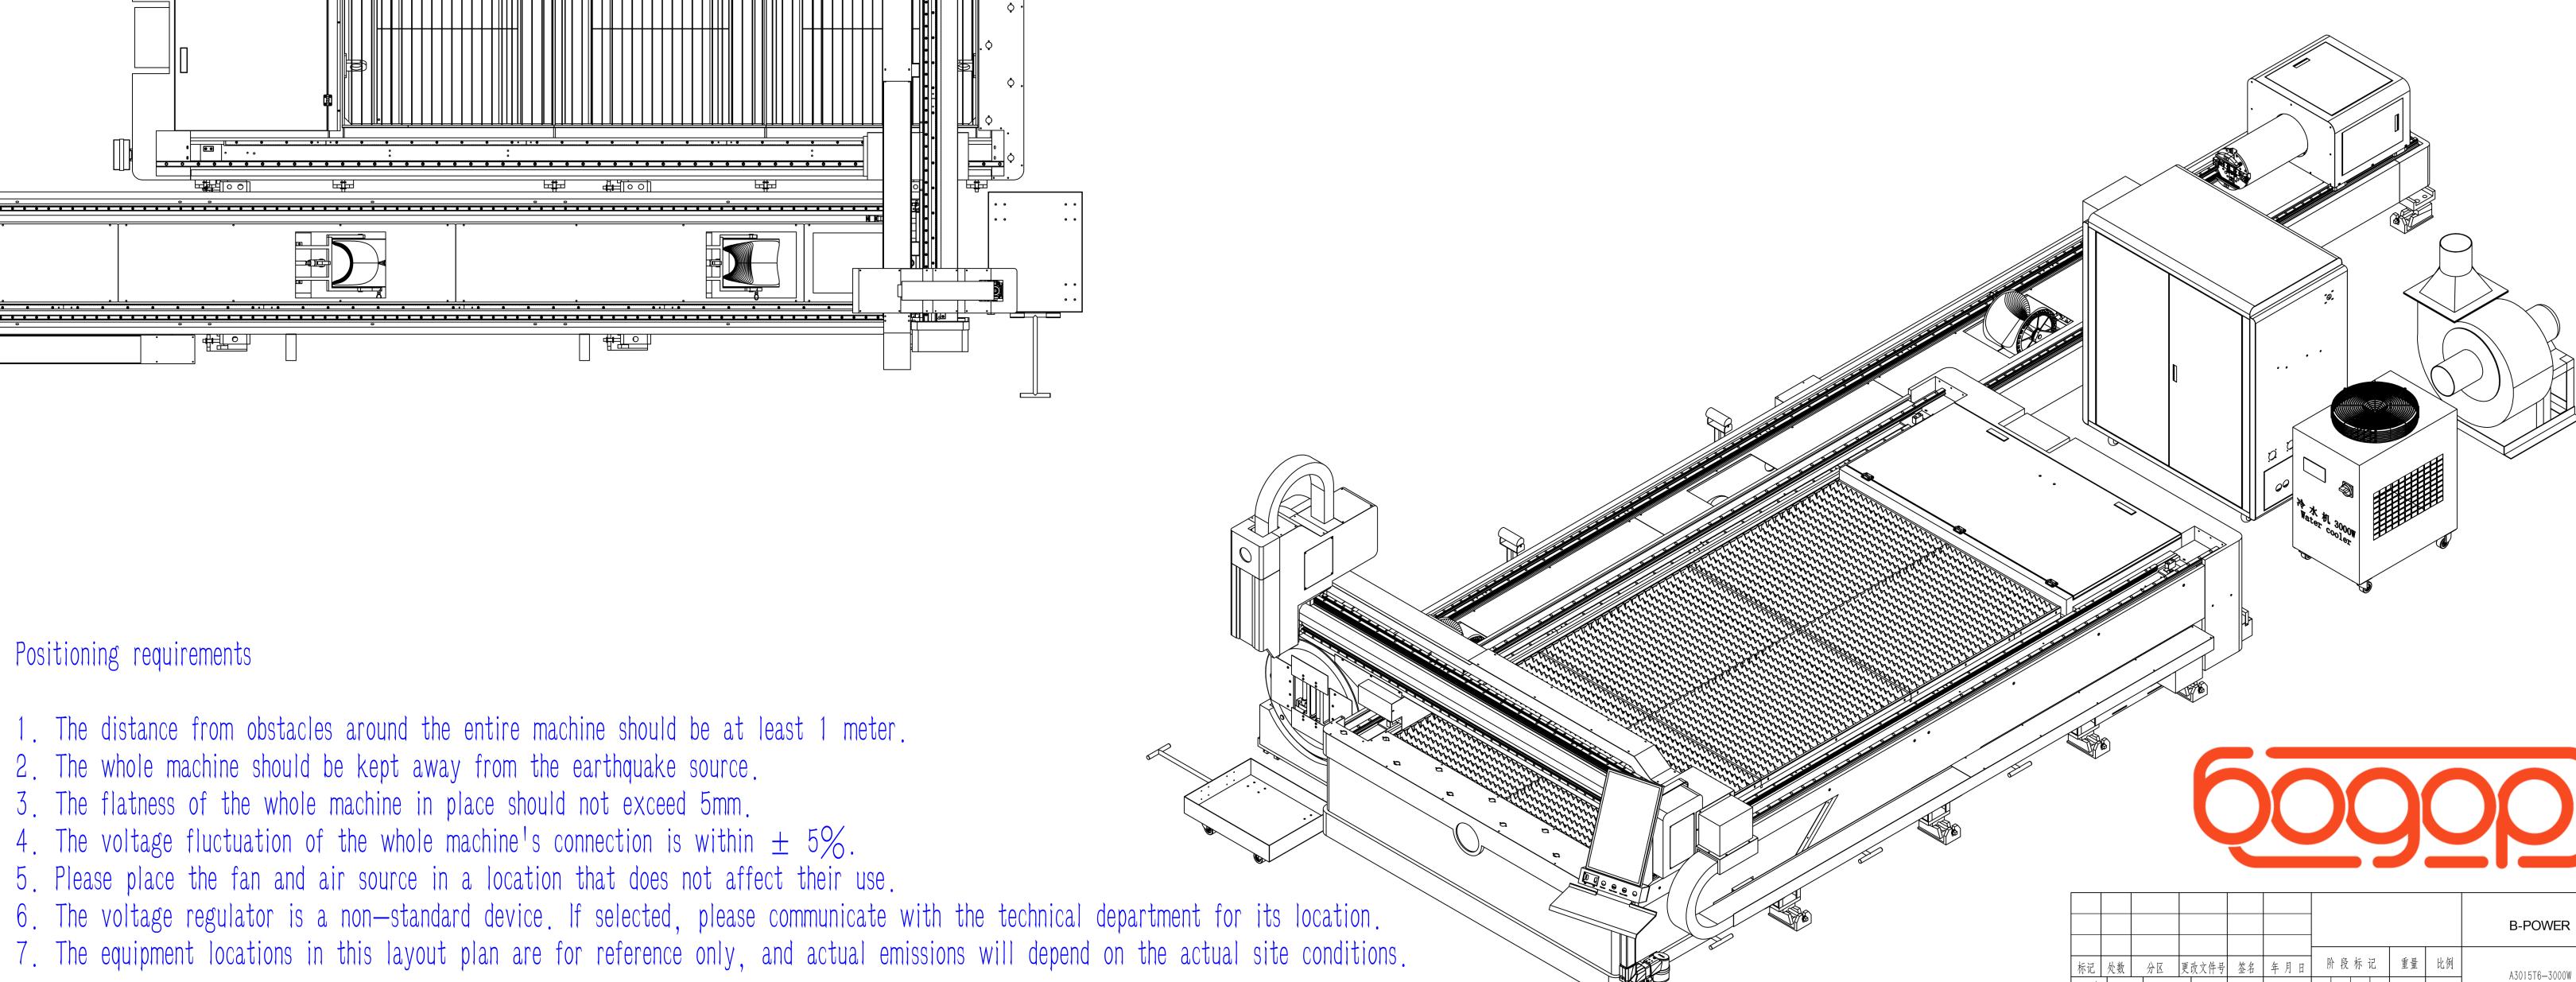

共1张 第1张 版本

就位要求

零件代号

借(通)用件登记

描图

描校

旧底图总号

底图总号

- 1.整机四周距障碍物至少1m。 2.整机应远离震源。 3.整机就位场地平整度应不大于5mm。 4.整机接入电压浮动在±5%以内。 5.风机及气源请自行放置在不影响使用的位置。 6.稳压器为非标设备,若选用,位置请与技术部沟通。 7.本布置图的设备位置仅做参考,实际排放根据现场实际况而定。
- www.bodor.ru info234@bodor.ru 8 800 550 84 21